

Industrial LAN Cable Connector assy type	Indusrrial Path Cord (STP) Recommend Assy.	Jun. 2024
	Patch Cord (Both side RJ45 Plug)	NO-1

CC-Link IE Field	EtherCAT [®] Technology Group	EtherNet/IP [™]
------------------	---	--------------------------

Okano Cable made Removable type STP LAN Cable

Style number	FCCL-2A331-(M=length)
--------------	-----------------------

Strong Point :

Frame retardant:VW-1 Heat resistant

Oil resistant : Flexibility

UL758 (80 °C · 60 V)

shield style (SA+SB) double (AL Tape+Alloy wire strand type)

Conductor(AWG30:Stranding type) CAT5e(1000BASE-T)

Tensil Strength:500N

Bendig Propertise

90°Left/Right Vibration Resistance Test(15million Over)

Cable Carrier Resistance Test 4000 ten thousand times over

Twist Resistance Test : U style:1000 tenthousand times ove

Purpose :For inside wiring Robot.for inside wiring Bord wiring for Industrial. Surveillance camera.



PoE(No correspond)

correspond of RoHS

O.Diameter:4.0mm

Max. length:20m

Both side RJ45 plug

Industrial EtherNet LAN Cable Optical Cable Optical Terminal Box Robot Cable Instrumentation Cable Network LAN Construction	 ネットシステム(タイ) 株式会社 Net System (Thai) Co.,Ltd Din Daeng,Din Daeng, Bangkok 10400 TEL 02-640-5674 FAX 02-640-5673 http://www.ns-tha.com
--	--

Industrial LAN Cable Connector assy type	Indusrrial Path Cord (STP) Recommend Assy.	Jun. 2024
	Patch Cord (Both side RJ45 Plug)	NO-1

CC-Link IE Field	EtherCAT [®] Technology Group	EtherNet/IP [®]
------------------	---	--------------------------

OKANO Cable made Water proof · Oil resistant STP LAN Cables

Style NO.	FCCL-21341-(M=Order length)
-----------	-----------------------------

Strong Point

Water Proof Abrasion Resistance

Oil Resisutance Fix Wiring

Use of Inside & Outside Band of Tem. (−30℃~70℃)

Double Shield (SA SB) (AL+Alloy wire stranding)

AWG24:0.5mm/Single wire CAT5e(1000BASE-T)

Environmental(medicines . Environment)

Polyurethane(Black color)

Papose:Inside and outside of factory

Please contact our sales staff . About LAN construction



Correspondece of RoHS

Cable diameter :6.7mm

Use of Max.cable length:100m

Standard Style : Both side RJ45Plug

(Attachable of water proof type)

Industrial EtherNet LAN Cable Optical Cable Optical Terminal Box Robot Cable Instrumentation Cable Network LAN Construction	 ネットシステム(タイ) 株式会社 Net System (Thai) Co.,Ltd Din Daeng,Din Daeng, Bangkok 10400 TEL 02-640-5674 FAX 02-640-5673 http://www.ns-tha.com
--	--

Net work Cable Optical Fiber Cables	CC-Link IE Control Recommended Product Items	2024. June
	Okano Cable made (Both side Optical Fiber) Path Cord	NO-3

2C Flat Optical Cord made by OKANO

CC-Link IE control recommend

Style number	OP-2444-1-(M=reserve)
--------------	-----------------------


Outer Jacket Nonharogen Flamereturdant Polyethylene

Structure Glasses Type :1.7mmx3.4mm

For Inside 2 cores · GI · OM2 · 50/125 · 5G

Recommend RoHS · C-Link IE control

Cord color wakakusa : LG-wakakusa:LC

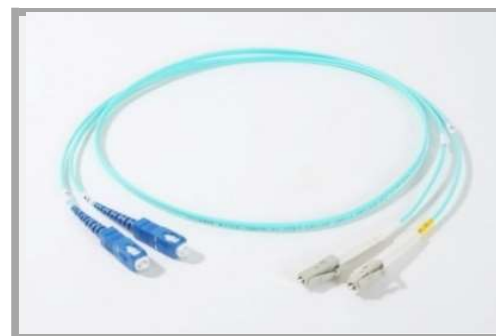

Target : DLC connector type

2c optical cable capacity to resist pressure type made by OKANO

CC-Link IE control recommend

Style number	OPF-B444-(M=reserve)
--------------	----------------------

Water proof. Pre Oil Abrasion Resistance


Pre. OIL Flame retardant (JIS 3005)

Use of inside & outside Temperature range -30~70°C

Diameter 6.2mm

Inside&outside 2 芯 · GI · OM2 · 50/125 · 5G

Cord color wakakusa:LG-: murasaki : Prple

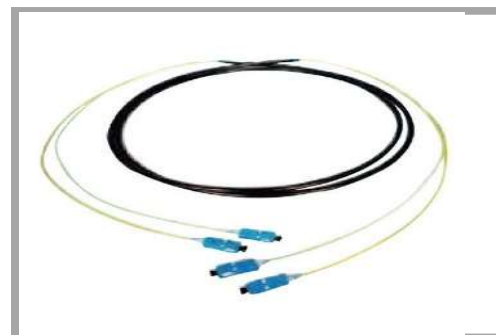

Target : DLC connector type

Optical Fiber · Please Contact Our Staff ,About Fusion Construction

Industrial EtherNet LAN Cable Optical Cable Optical Terminal Box Robot Cable Instrumentation Cable Network LAN Construction		ネットシステム(タイ) 株式会社 Net System (Thai) Co.,Ltd
	Din Daeng, Din Daeng, Bangkok 10400 TEL 02-640-5674 FAX 02-640-5673	http://www.ns-tha.com